


PRODUCT FEATURES

- Ultrafast Recovery Time
- Low Recovery Loss
- Soft Reverse Recovery Characteristics
- Low Leakage Current
- Low Forward Voltage
- High Surge Current Capability


APPLICATIONS

- Freewheeling, Snubber, Clamp
- Inversion Welder
- PFC
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Converter & Chopper
- UPS



DESCRIPTION

FRED from MacMic utilizes advanced processing techniques to achieve ultrafast recovery times and higher forward current. Its soft recovery characteristics and high reliability suit for wide industrial applications.



ABSOLUTE MAXIMUM RATINGS ($T_C=25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions		Values	Unit
V_R	Maximum D.C. Reverse Voltage		1000	V
V_{RRM}	Maximum Repetitive Reverse Voltage			
$I_{F(AV)}$	Average Forward Current	$T_C=110$	60	A
$I_{F(RMS)}$	RMS Forward Current	$T_C=110$	84	
I_{FSM}	Non Repetitive Surge Forward Current	$T_J=25$, $t=10\text{ms}$, 50Hz, Sine	500	
P_D	Power Dissipation		375	W
T_J	Junction Temperature		-55 to +175	
T_{STG}	Storage Temperature Range		-55 to +150	
Torque	To Heat Sink	Recommended M3	1.1	Nm
R_{thJC}	Junction to Case Thermal Resistance		0.4	/W
Weight			6	g

ELECTRICAL CHARACTERISTICS ($T_C=25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit
I_{RM}	Maximum Reverse Leakage Current	$V_R=1000\text{V}$			10	μA
		$V_R=1000\text{V}, T_J=150$			500	
V_F	Forward Voltage	$I_F=60\text{A}$		2.5	3.2	V
		$I_F=60\text{A}, T_J=150$		2		
trr	Reverse Recovery Time ($I_F=1\text{A}, di_F/dt=-200\text{A}/\mu\text{s}, V_R=30\text{V}$)			30	40	ns
trr	Reverse Recovery Time ($I_F=0.5\text{A}, I_R=1\text{A}, I_{RR}=0.25\text{A}$)			50	60	ns

MacMic Science & Technology Co., Ltd.

Add #18, Hua Shan Zhong Lu, New District, Changzhou City, Jiangsu Province, P. R. of China

Tel. +86-519-85163708 Fax +86-519-85162291 Post Code 213022 Website www.macmicst.com

ELECTRICAL CHARACTERISTICS ($T_C=25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions	Min.	Typ.	Max.	Unit
t_{rr}	Reverse Recovery Time		215		ns
I_{RRM}	Maximum Reverse Recovery Current		5		A
Q_{RR}	Reverse Recovery Charge		1100		nC
t_{rr}	Reverse Recovery Time		375		ns
I_{RRM}	Maximum Reverse Recovery Current		11.5		A
Q_{RR}	Reverse Recovery Charge		2700		nC
t_{rr}	Reverse Recovery Time		240		ns
I_{RRM}	Maximum Reverse Recovery Current		24.5		A
Q_{RR}	Reverse Recovery Charge		3950		nC

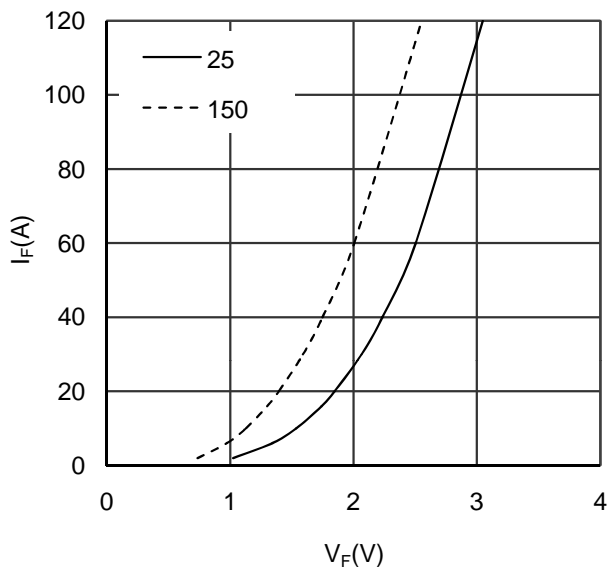


Figure 1. Forward Voltage Drop vs Forward Current

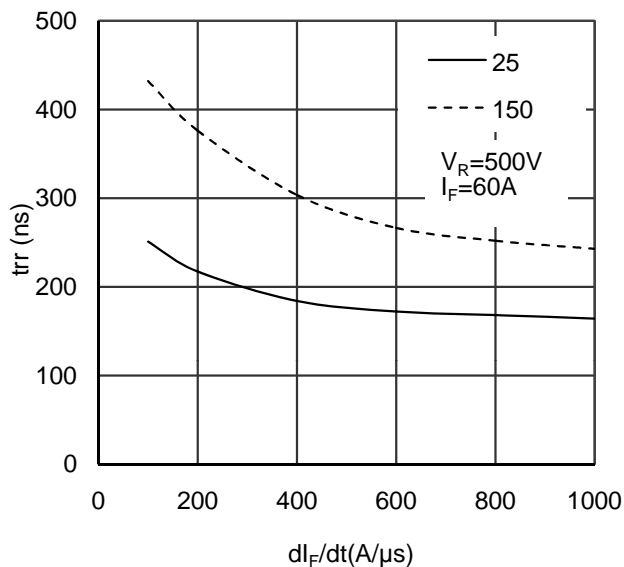


Figure 2. Reverse Recovery Time vs dI_F/dt

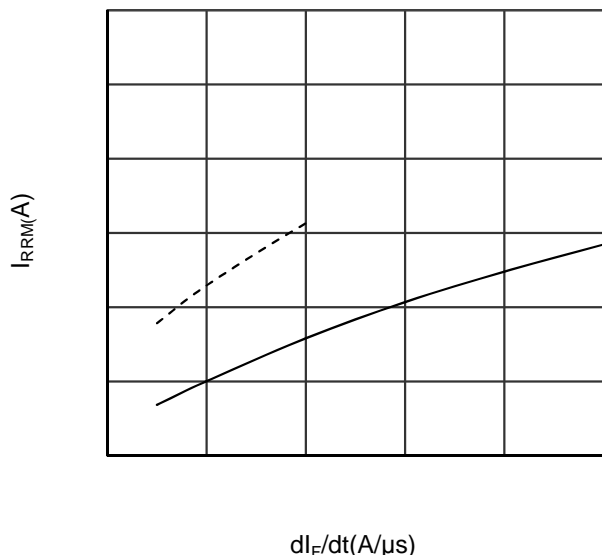


Figure 3. Reverse Recovery Current vs dI_F/dt

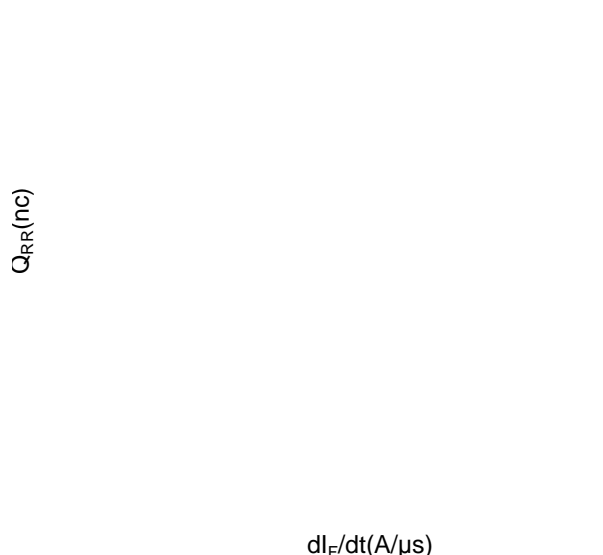


Figure 4. Reverse Recovery Charge vs dI_F/dt

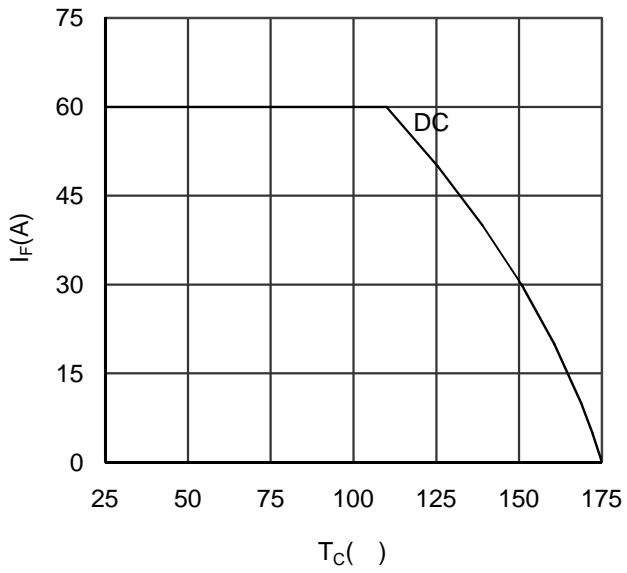


Figure 5. Forward current vs Case temperature

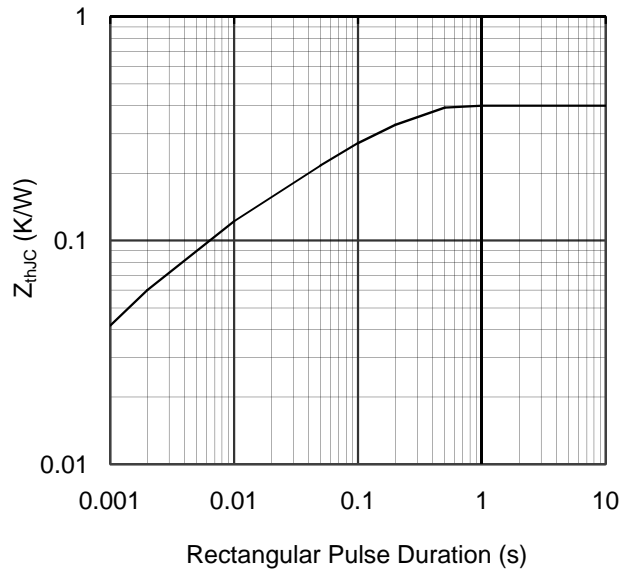


Figure 6. Transient Thermal Impedance

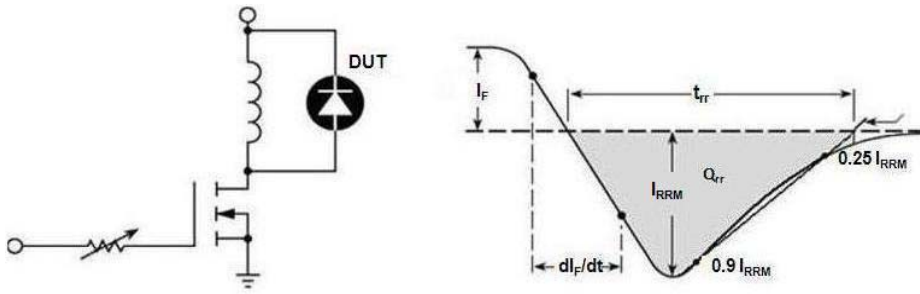


Figure 7. Diode Reverse Recovery Test Circuit and Waveform

Dimensions in (mm)
Figure 8. Package Outline